


Cable Assemblies - 40 Series: 1/4-28 Threads

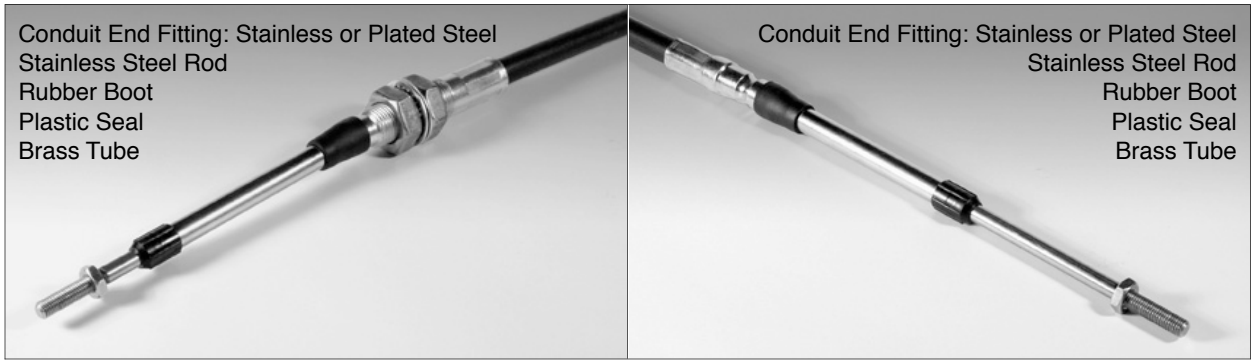


Bulkhead - Bulkhead 40 Series Cable

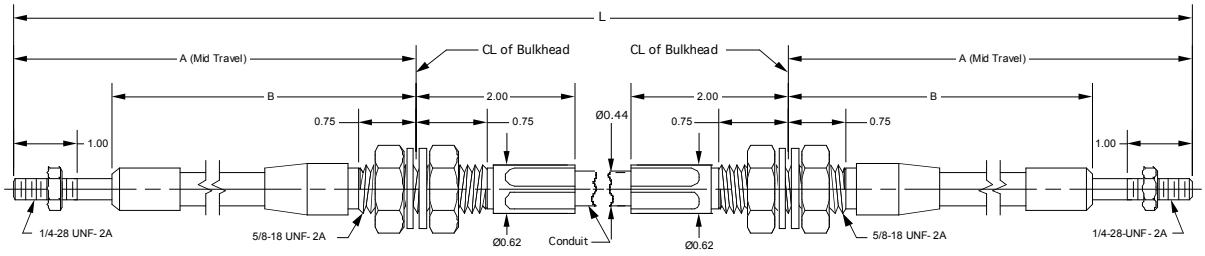

Bulkhead - Grooved 40 Series Cable

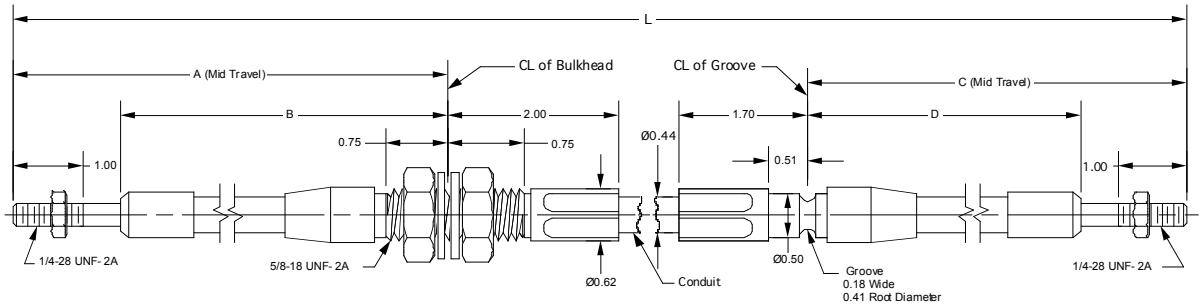

Grooved - Grooved 40 Series Cable

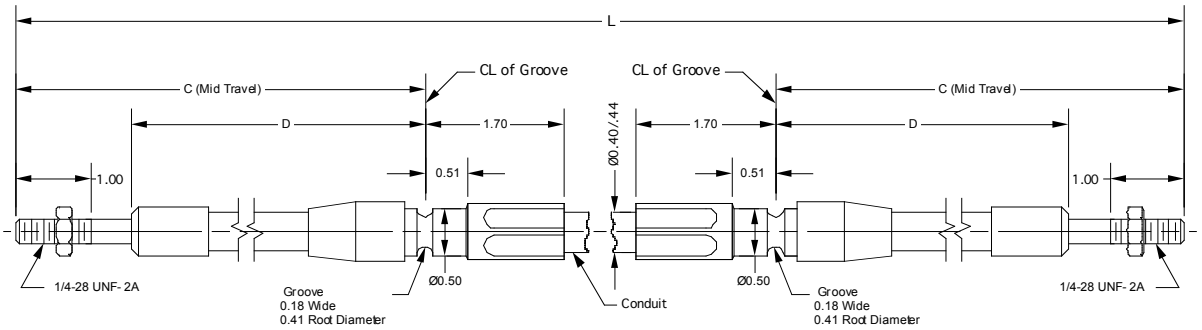

Travel	Bulkhead Type Fitting		Grooved Type Fitting		Input Load Pounds
	"A"	"B"	"C"	"D"	
1"	4.62	3.19	4.00	2.56	120
2"	6.13	4.19	5.50	3.56	90
3"	7.62	5.19	7.00	4.56	75
4"	9.13	6.19	8.50	5.56	65
5"	10.62	7.19	10.00	6.56	60
6"	12.13	8.19	11.50	7.56	60
8"	15.13	10.19	-	-	40

Minimum Bend Radius: 6" Operating Ranges: -65° F to 225° F

Conduit Construction: Multiple strands of oil-tempered carbon spring steel wires covered with polyethylene to resist contaminants, dirt, abrasion and common solvents.

Conduit End Fitting Options: Zinc Silver (Clear) Plated Steel, or Stainless Steel

Armor (Standard) Core: consists of stainless steel flat wire swaged over galvanized steel stranded cable, burnished to a smooth, close tolerance finish.

Nylon Covered (High Efficiency) Core: consists of a stranded galvanized cable covered with nylon to provide higher efficiency, reduced lost motion, and more flexible push-pull control for moderate load applications.

In addition to the above custom cables, MCP also offers the following standard cables

Part Number	Lgth	Style (BH = Bulkhead, GV = Grooved)		Travel
		Left End	Right End	
40-048-BH-BH-3	48"	BH	BH	3"
40-048-GV-GV-3	48"	GV	GV	3"
40-060-BH-BH-3	60"	BH	BH	3"
40-060-BH-BH-4	60"	BH	BH	4"
40-060-GV-GV-3	60"	GV	GV	3"
40-072-BH-BH-3	72"	BH	BH	3"
40-072-BH-BH-4	72"	BH	BH	4"
40-072-GV-GV-3	72"	GV	GV	3"

Part Number	Lgth	Style (BH = Bulkhead, GV = Grooved)		Travel
		Left End	Right End	
40-096-BH-BH-3	96"	BH	BH	3"
40-096-GV-GV-3	96"	GV	GV	3"
40-108-BH-BH-3	96"	BH	BH	3"
40-108-GV-GV-3	96"	GV	GV	3"
40-120-BH-BH-3	120"	BH	BH	3"
40-120-GV-GV-3	120"	GV	GV	3"
40-156-BH-BH-3	156"	BH	BH	3"
40-156-BH-BH-4	156"	BH	BH	4"